

FIG.1

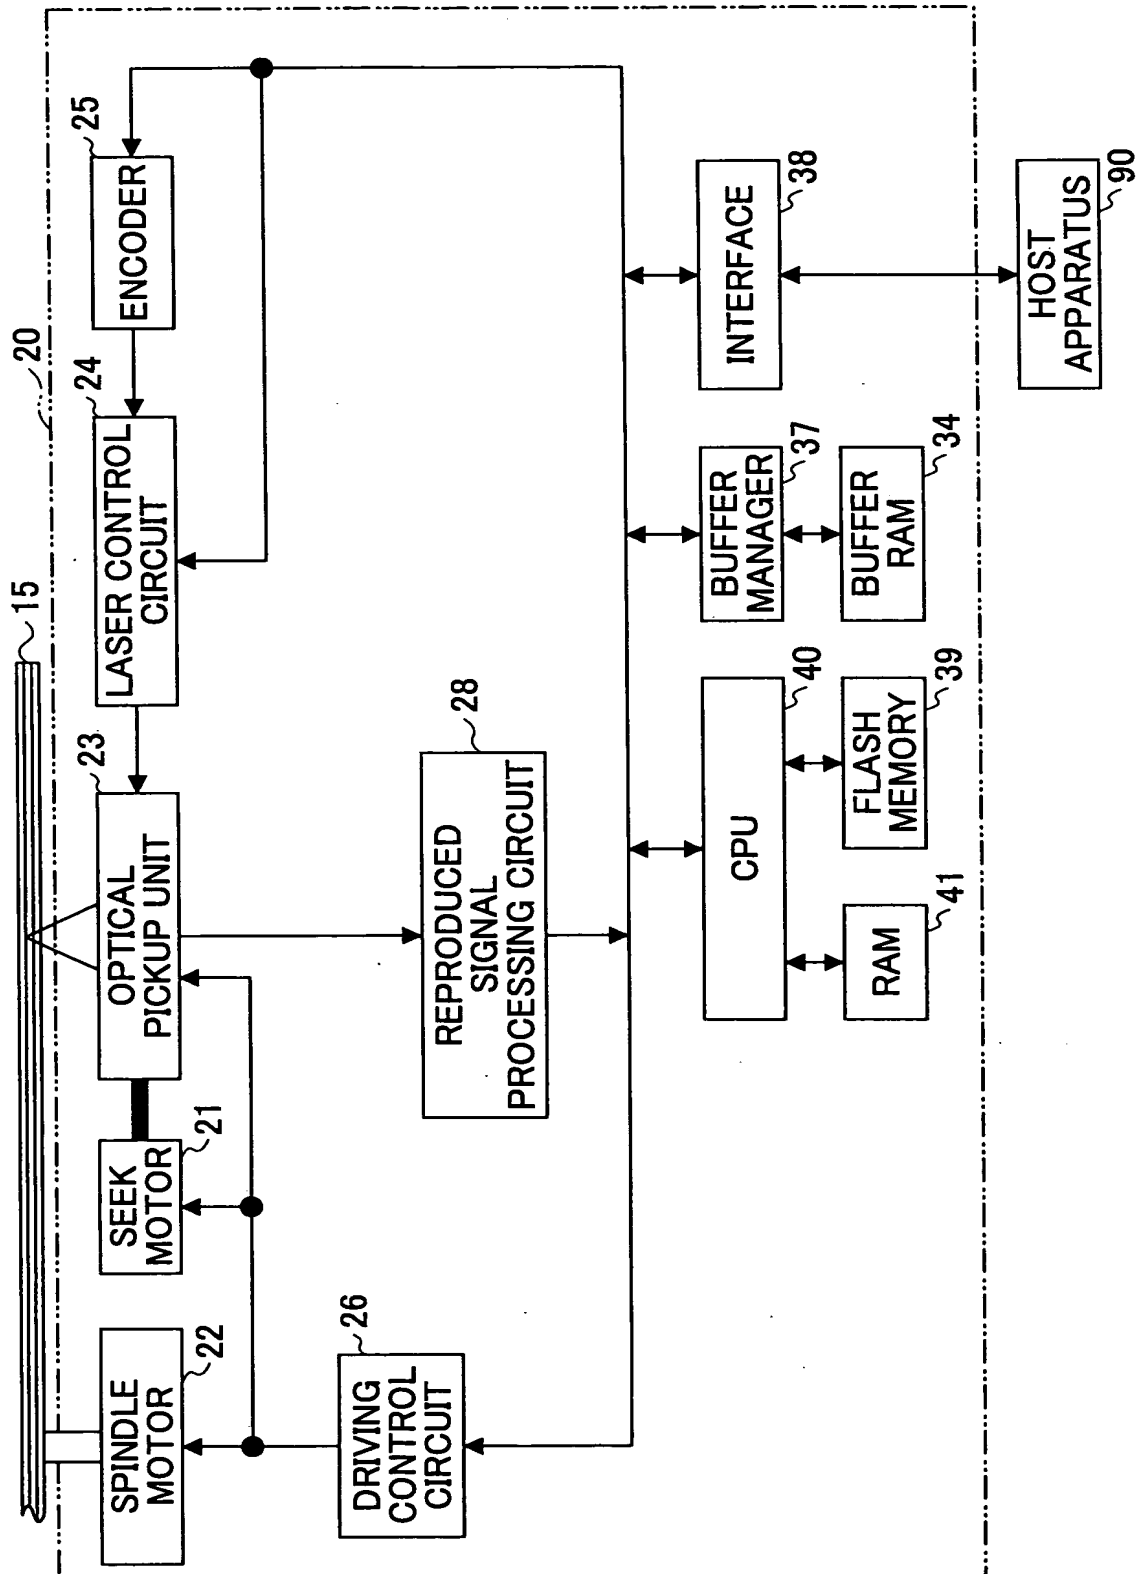


FIG.2

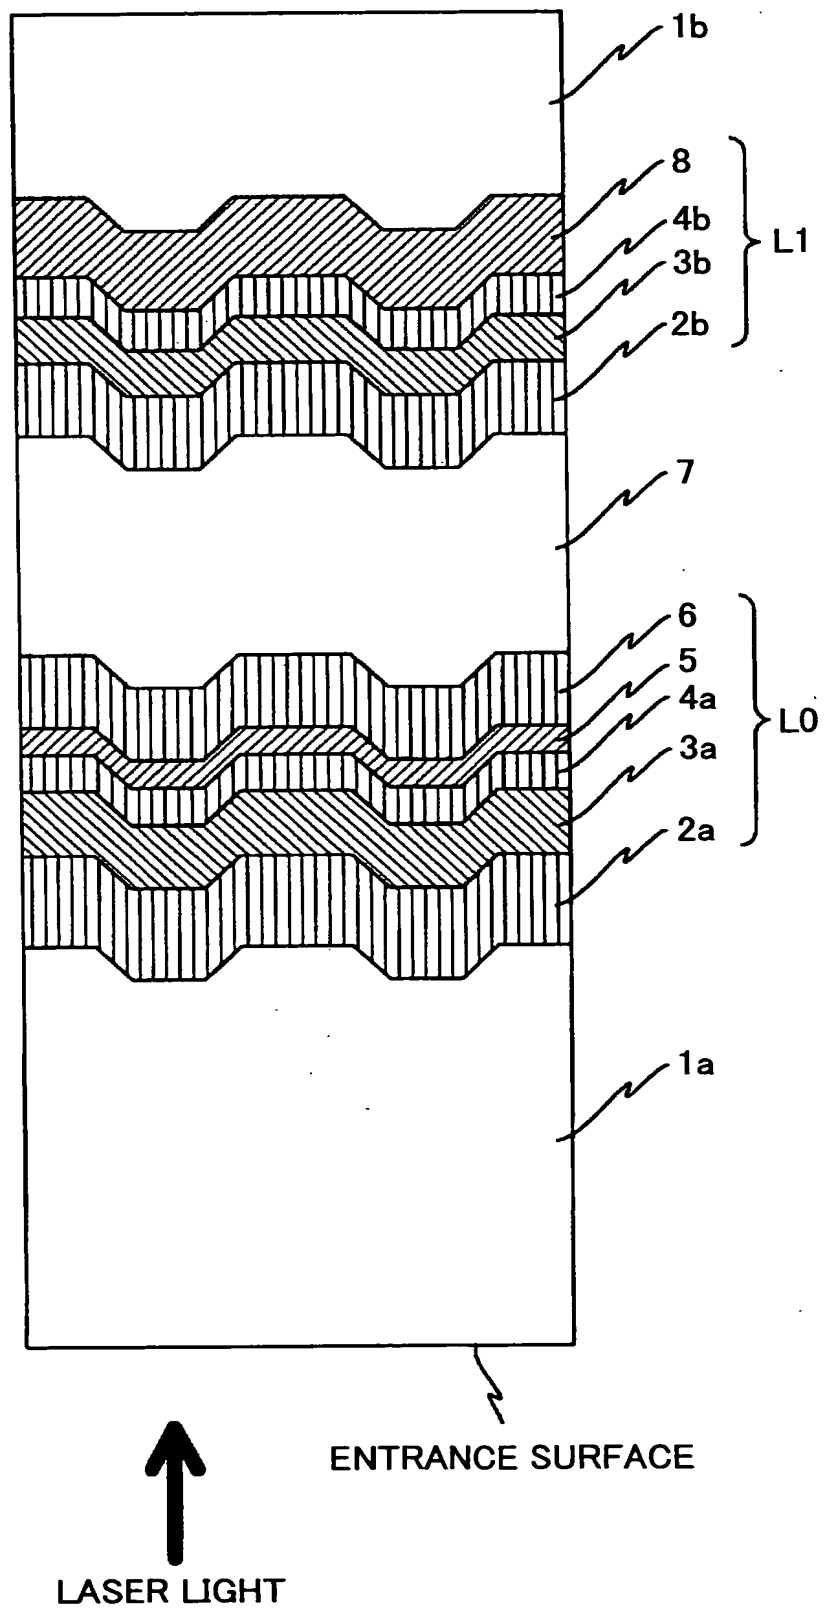


FIG.3A

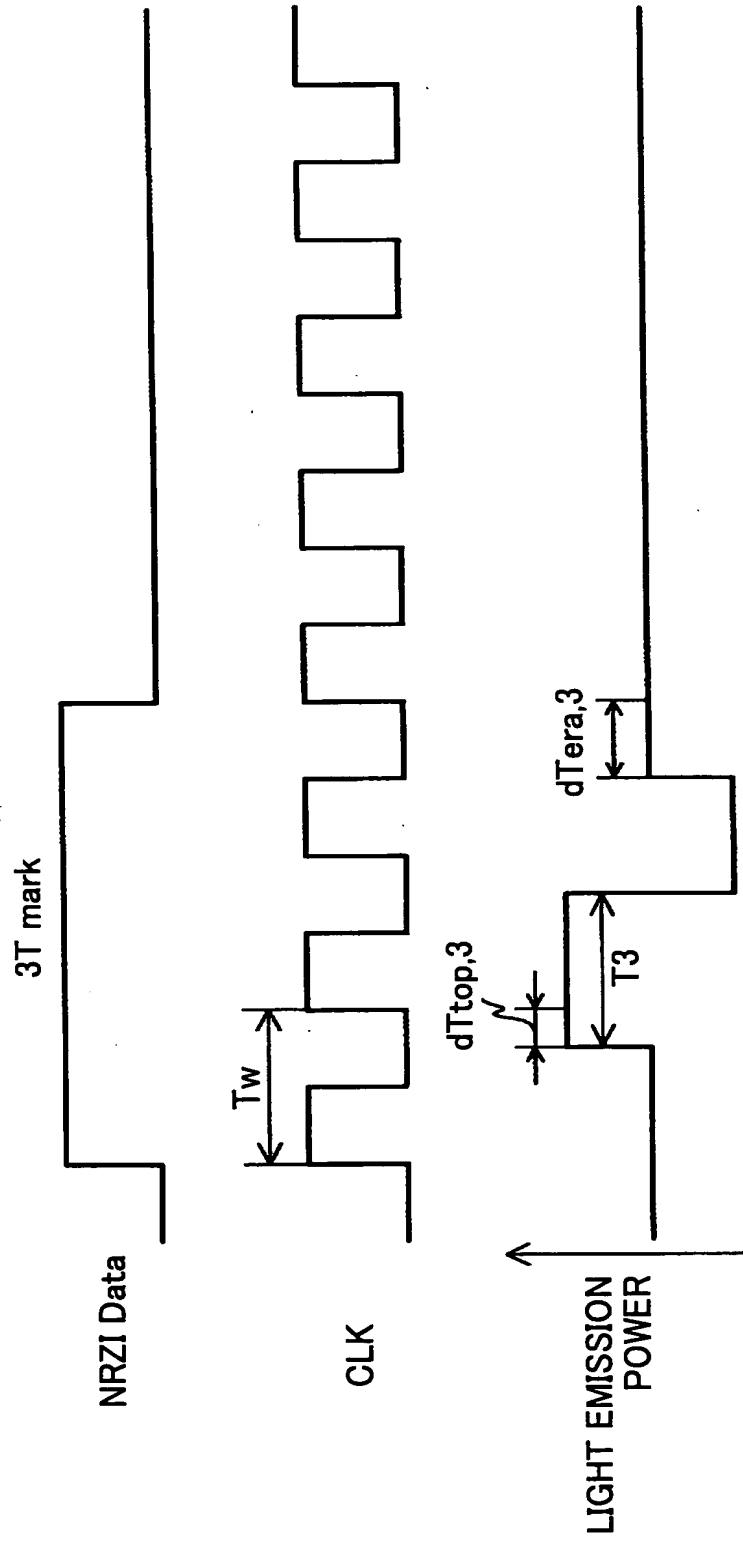


FIG.3B

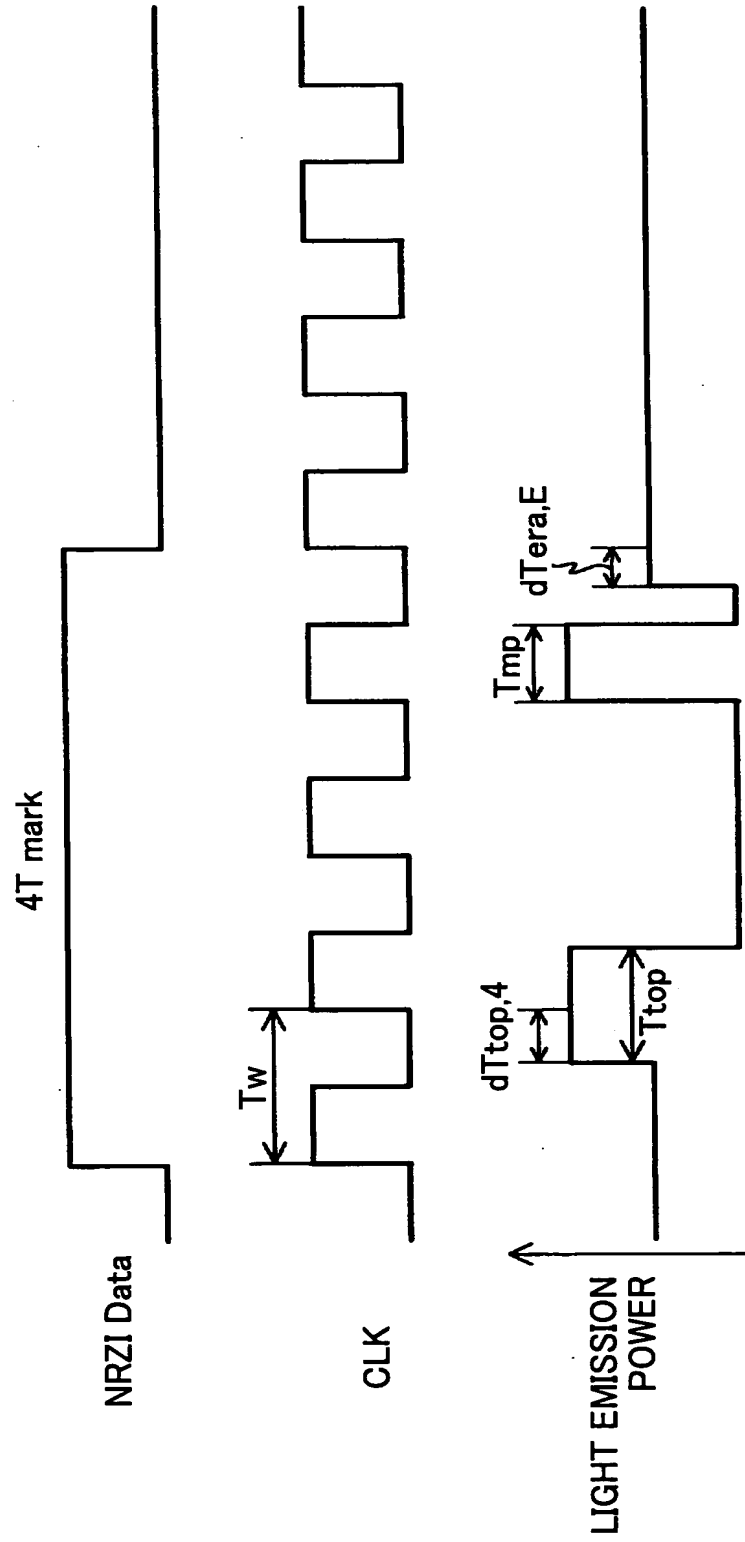


FIG.4A

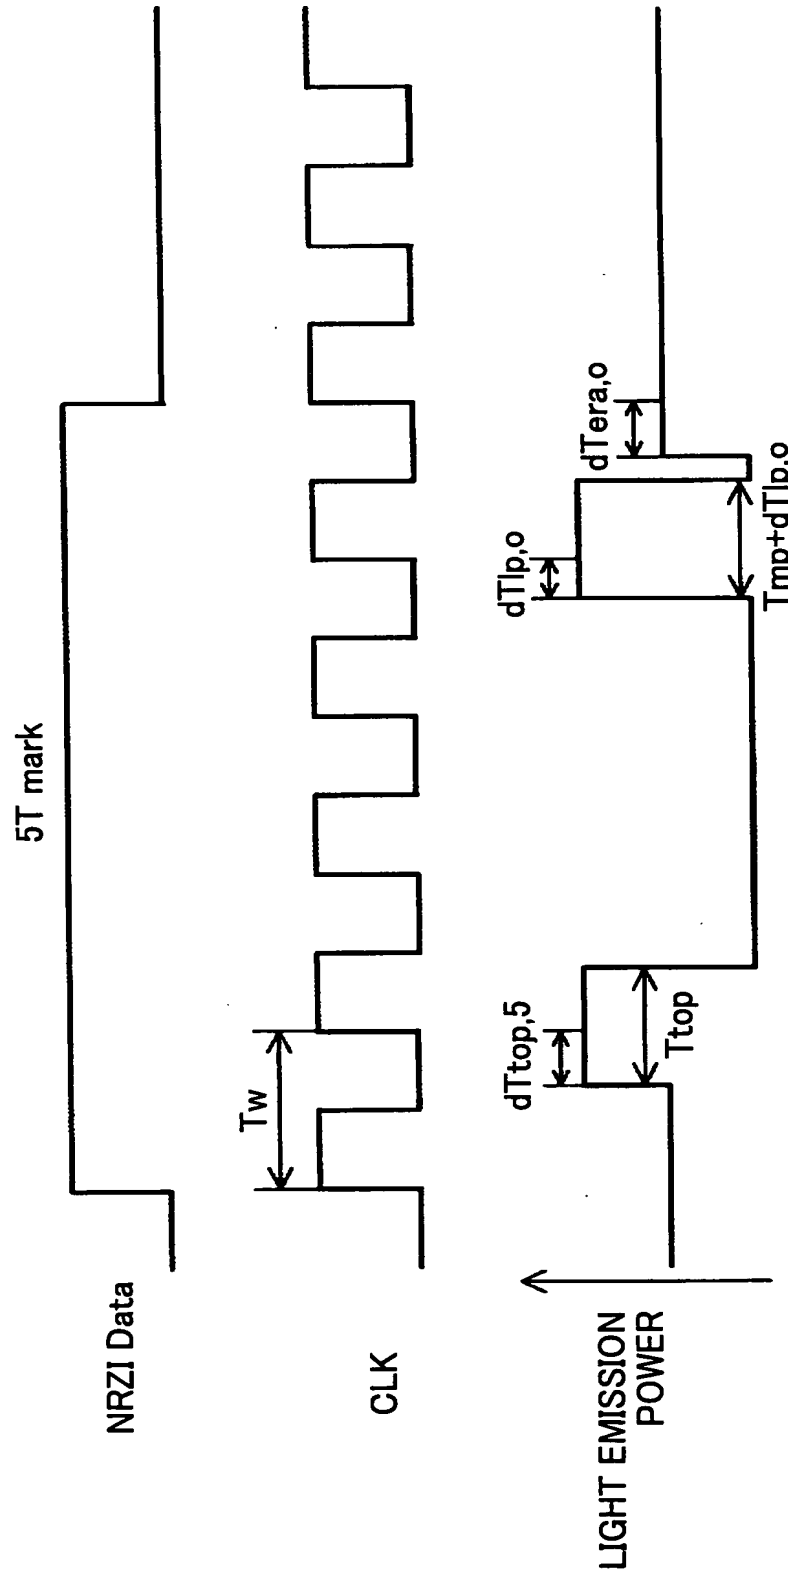


FIG.4B

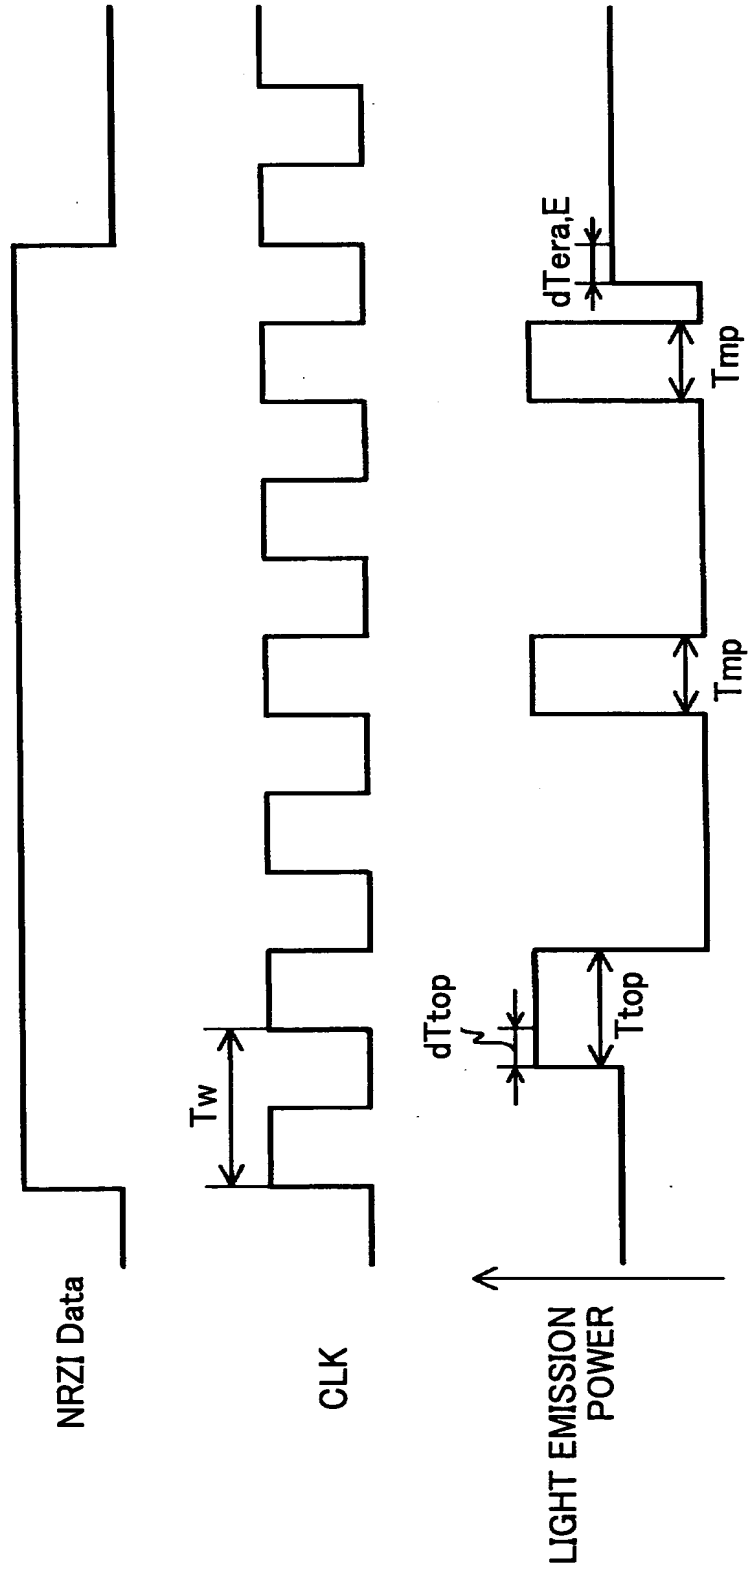
6T mark
(Even mark)

FIG.5

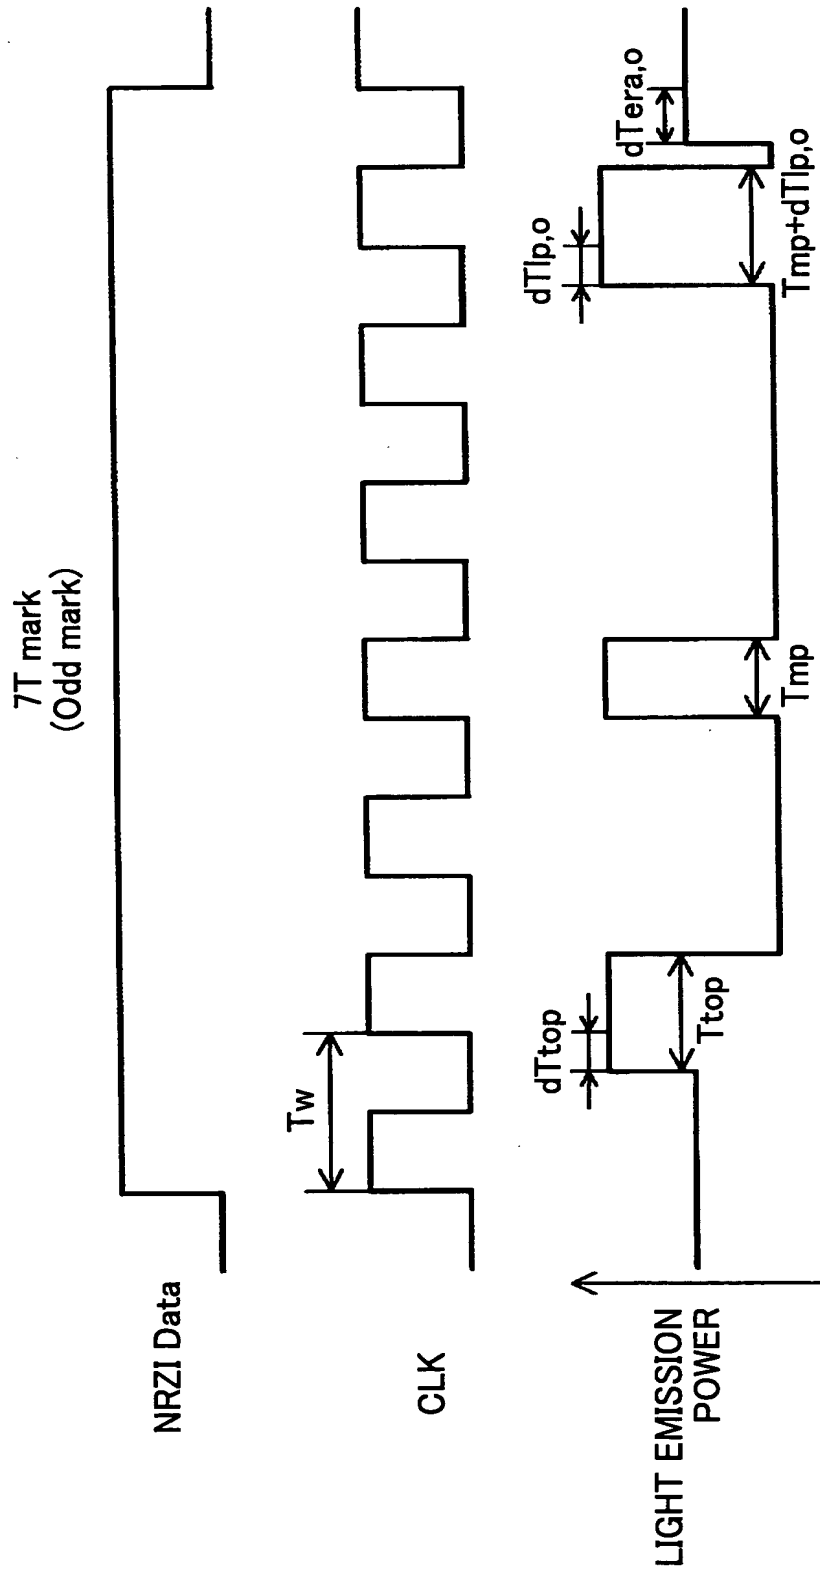


FIG.6

PARAMETER	L0	L1
OPTIMUM WRITE POWER (P _w)	42mW	50mW
P _e /P _w	0.4	0.43
T _{mp}	0.56	0.63
T _{top}	0.50	0.56
dT _{top}	0.00	0.00
T ₃	0.75	0.81
dT _{top,3}	-0.13	-0.13
dT _{era,3}	0.25	0.13
dT _{top,4}	0.00	0.00
dT _{era,E}	0.38	0.38
dT _{top,5}	0.00	0.00
dT _{lp,o}	0.00	0.06
dT _{era,o}	0.38	0.38

FIG.7

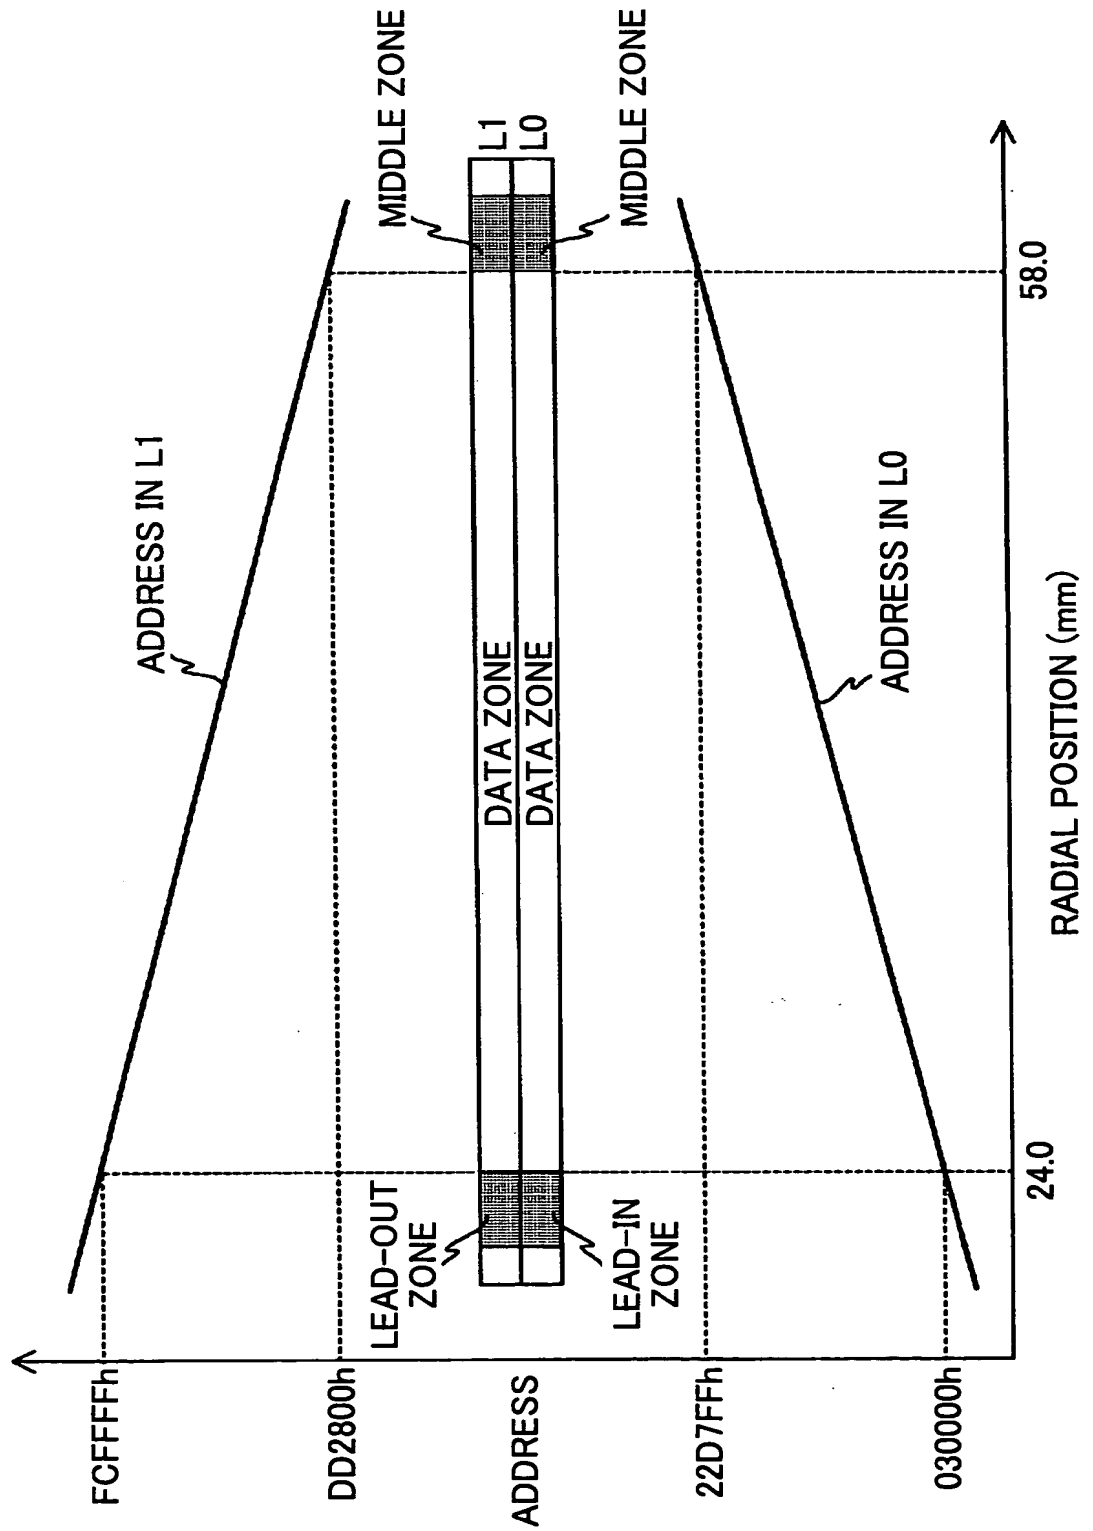


FIG.8

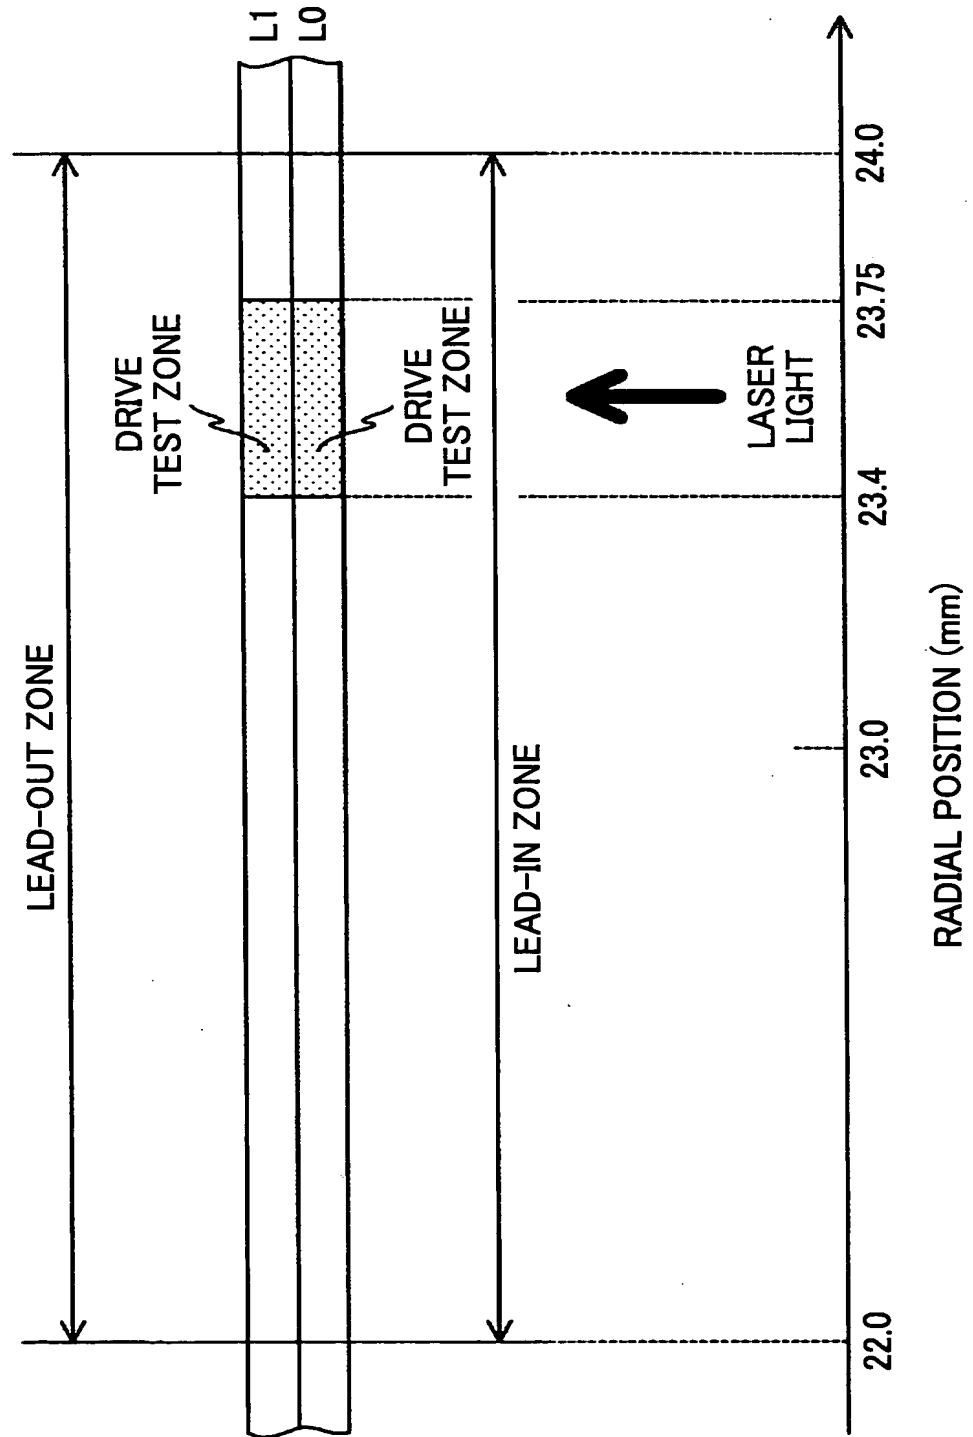


FIG.9

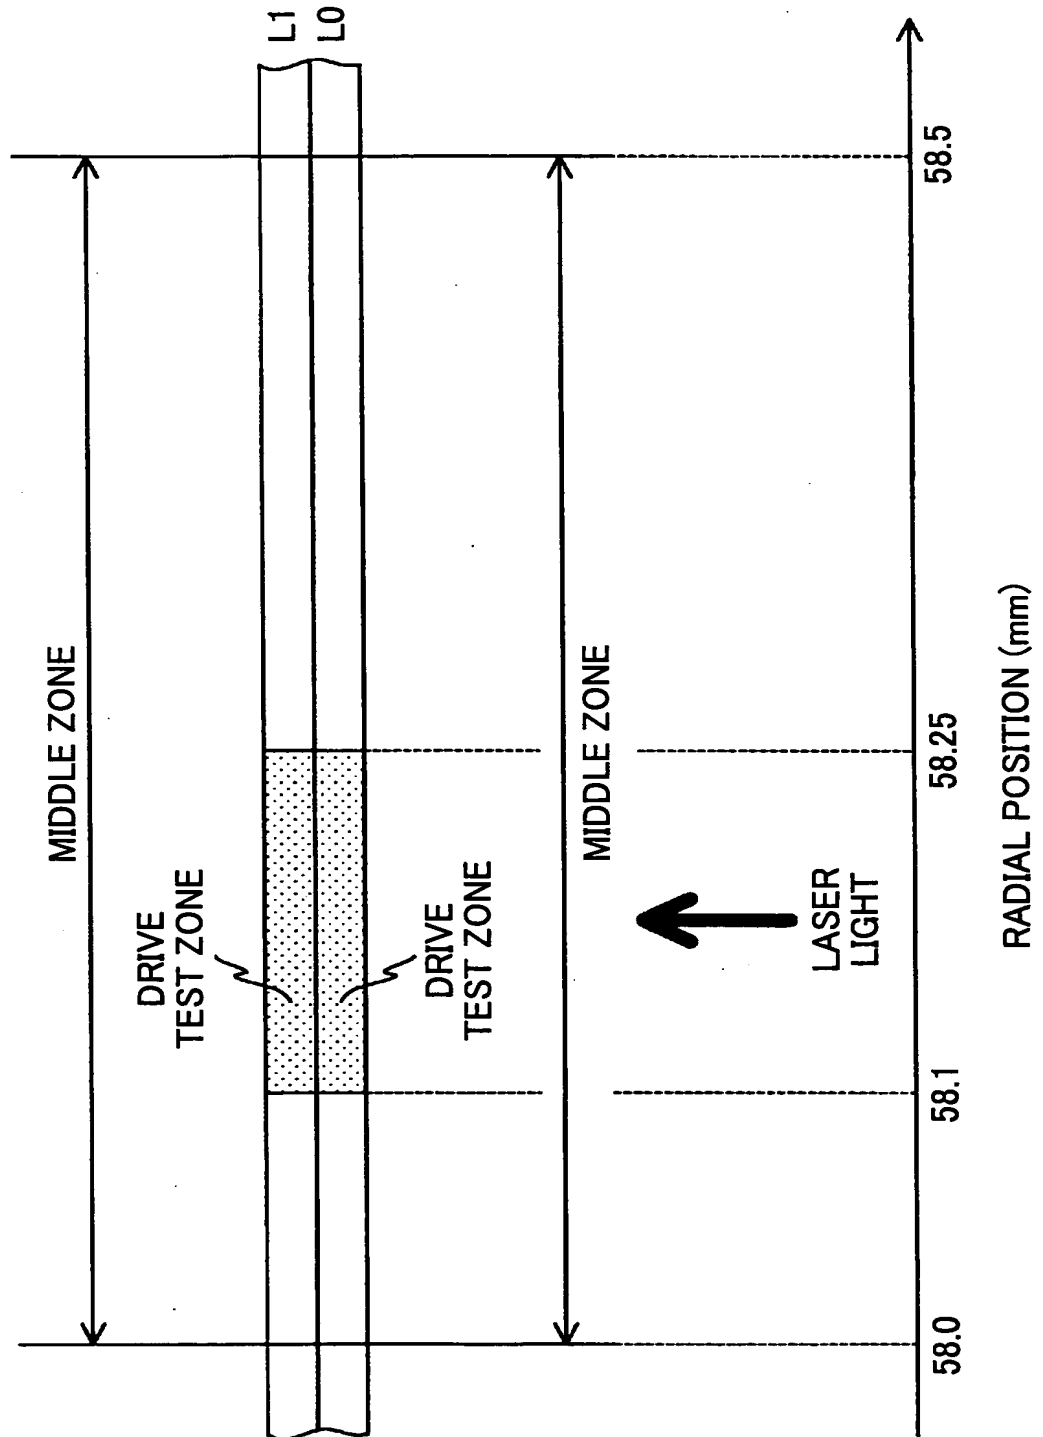


FIG.10

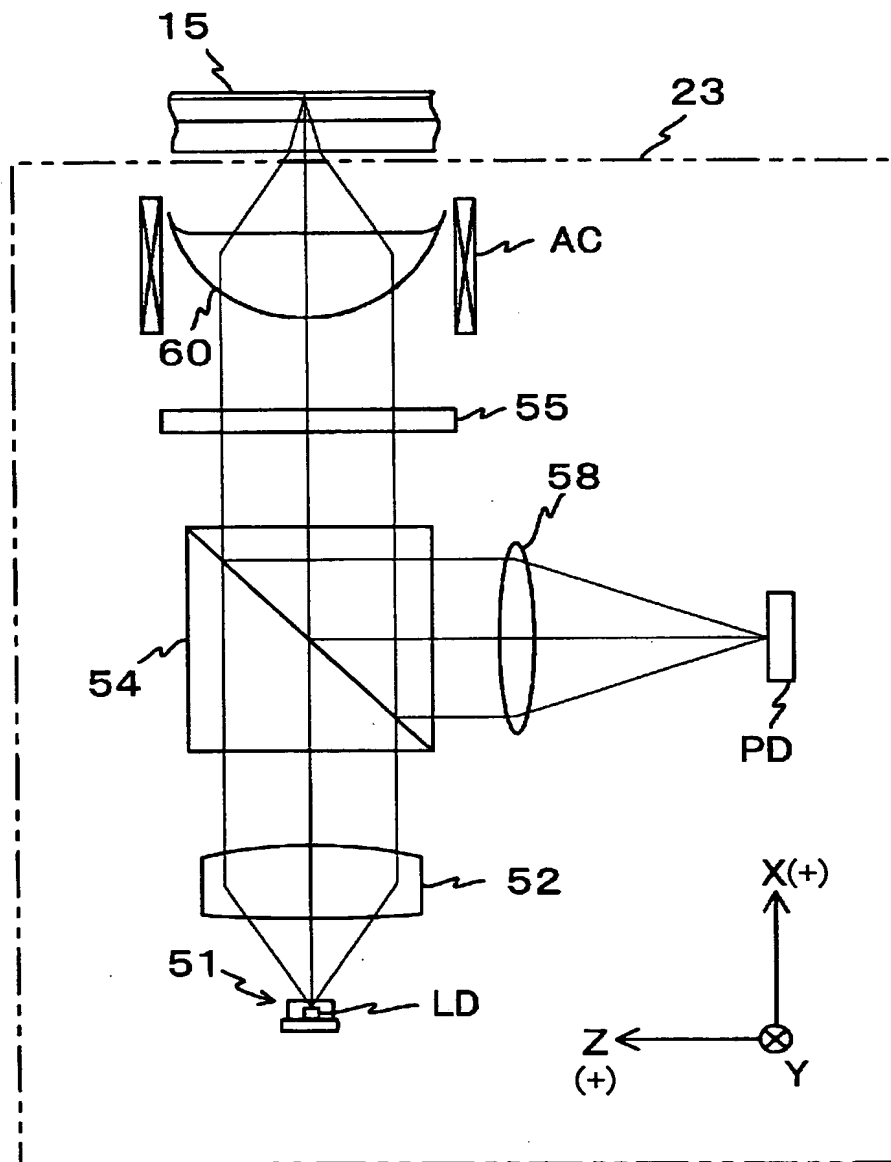


FIG.11

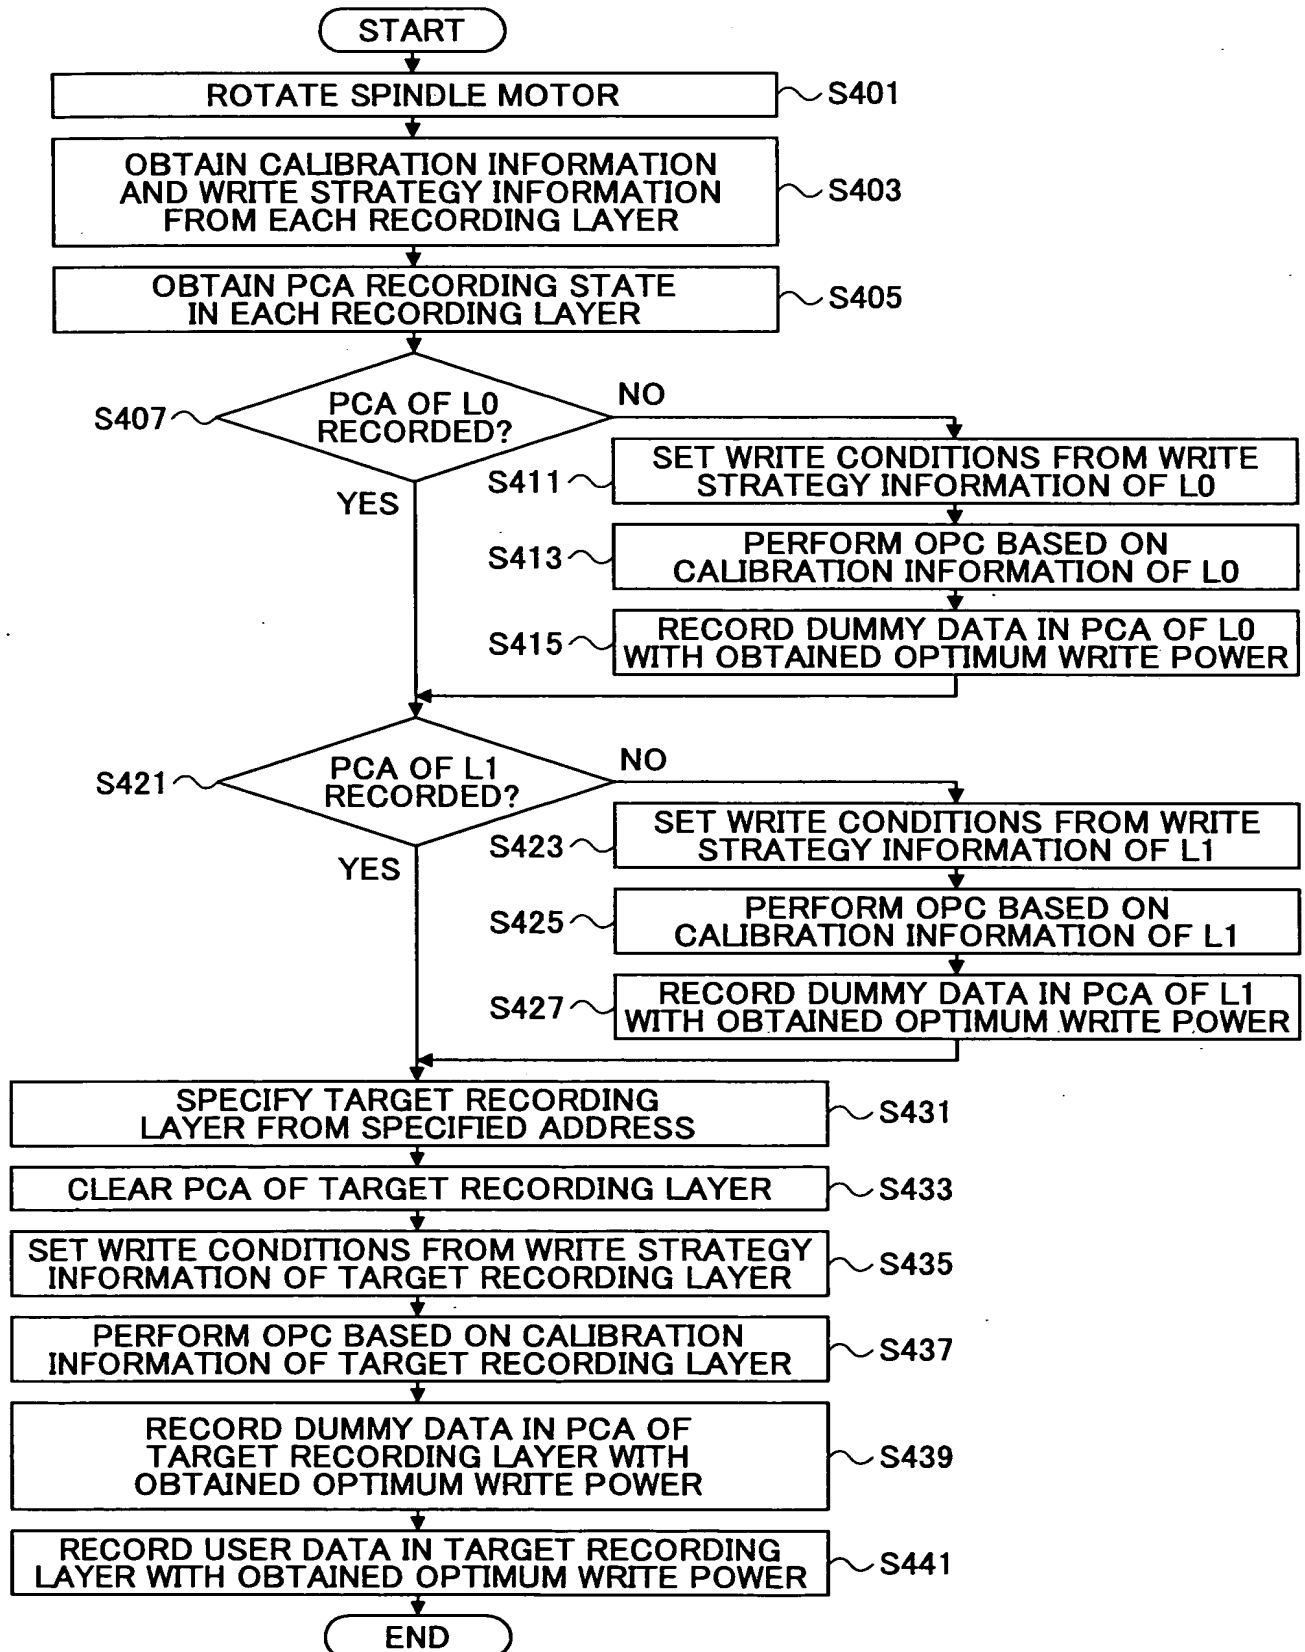


FIG.12

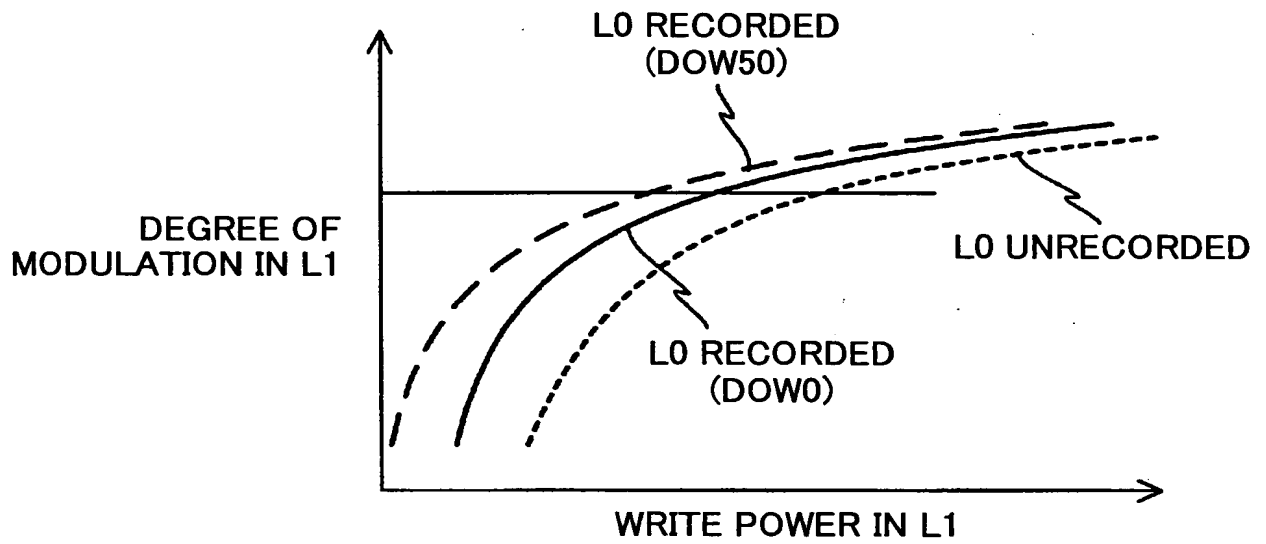


FIG.13

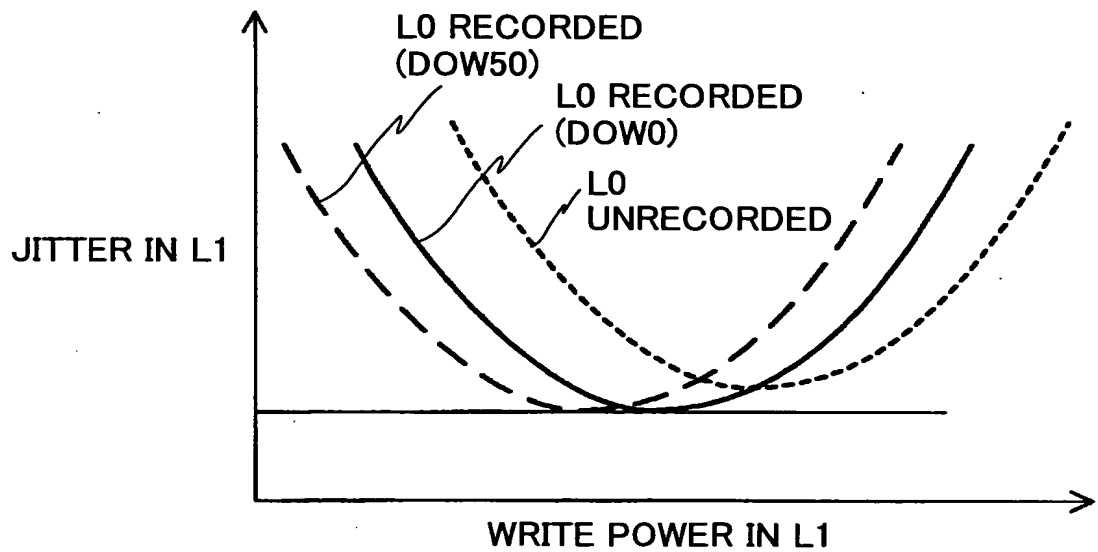


FIG.14

